

JACOB JENSEN for Hotels





#### **About JACOB JENSEN DESIGN**

The Scandinavian designer Jacob Jensen established his studio in 1958 and over the following decades created the revolutionary, pure and now classic form language which has made him one of the world's most recognised designers. Jacob Jensen has 19 products included in The Design Study Collection and The Design Collection of The Museum of Modern Art in New York.

Jacob Jensen's son Timothy Jacob Jensen has established the trademark JACOB JENSEN and clarified the universal potential of the form language by transferring it to many product groups. Bell Xpress has been an important player on this journey and has fathered the product line presented in this catalogue.

This catalogue shows the JACOB JENSEN™ Telephone Series. Equipped with various features the telephones have one thing in common: they are all very suitable for hotels. Further, the unique design completes the room refurbishing and adds “that little something” to the overall impression giving the guest an even more beautiful stay at your hotel.


#### **About BITTEL**

Bittel is a rapidly growing provider of innovative technology solutions for the global hospitality industry. Bittel products are known for their reliability and groundbreaking designs, and are installed in tens of thousands of hotels around the world. Headquartered in Rizhao, China, Bittel's North American operations are based in San Jose, California.




#### **Selection of references**

Ritz Carlton Budapest Hungary  
Steigenberger HOTEL MASLAK ISTANBUL, Turkey  
Spice Hotel & spa Antalya Turkey  
AC Hotel Cambridge, MA, USA  
Holiday Inn Express Karlsruhe  
Swissotel the Bosphorus, Istanbul Turkey  
NIKKI RESORT BODRUM Turkey  
Aqua Safari Hotel Ghana  
Amano hotel Berlin Germany  
KING FAISAL SPECIALIST - H-Complex  
Marriott Hotel Berlin, Germany  
Nikki Beach, UAE  
Sansi Hotel, Leida Spain  
Inglaterra Hotel Spain  
InterContinental Bucharest Romania  
Trig-point Hotel  
Polat Renaissance Hotel Istanbul Turkey  
Royal Hotel Seoul, Korea  
AMAN Philippines

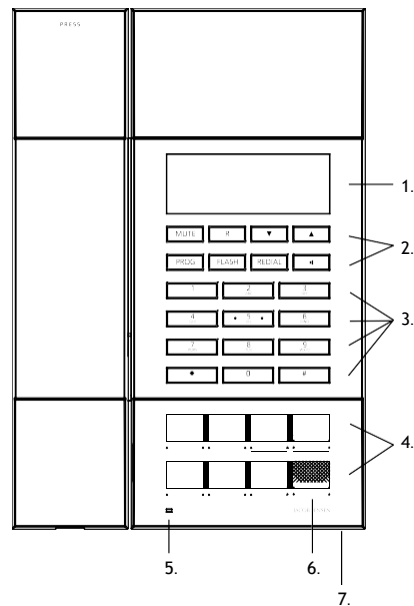

**Base unit - front**

- 1. LCD screen display
- 2. 8 functional keys
- 3. 12 numerical keys
- 4. Service buttons
- 5. Indicator (LED) - for "Mute (red)" and "Line in use (blue)"
- 6. Message waiting indicator
- 7. Hands-free microphone

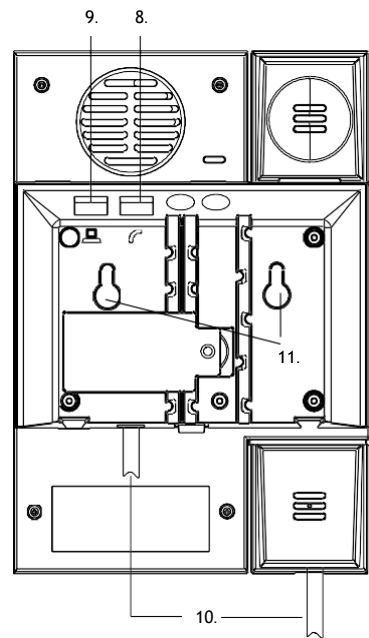

**Base unit - rear**


- 8. Telephone line jack
- 9. Data port
- 10. Handset cord jack
- 11. Holes for wall mounting


**Colour scheme - front plates**



**Telephone HT60**

**Main Features**

- Caller ID display, supports FSK and DTMF.
- Caller ID number disappears after 30 seconds.
- Hearing aid compatible handset.
- Data port - for connecting MODEM, fax, etc.
- Service buttons - can be programmed and kept forever.
- Volume buttons   to adjust the speaker and handset volume.
- FLASH - The default is 100ms. Can be set from 100ms to 600ms according to the network specifications.
- REDIAL button redials the last number dialled.
- PROG button - programmes the service buttons.
- MUTE button.
- LED indicator for "Line in use (blue)" and "Mute (red)".
- R button - Signalling the PBX to activate the flash function. The default is 100ms.
- Speaker button with indicator.
- Message waiting and ringing indicator.
- Busy tone disconnects automatically.
- Programme service button with R.P master cloner and handheld cloner.
- Pre-dial function (32 at most), which can be automatically dialled when you pick up the handset.
- Room number shown in display.
- Desktop and wall mounting.
- Approved standards: EN 55022 and EN 55024.

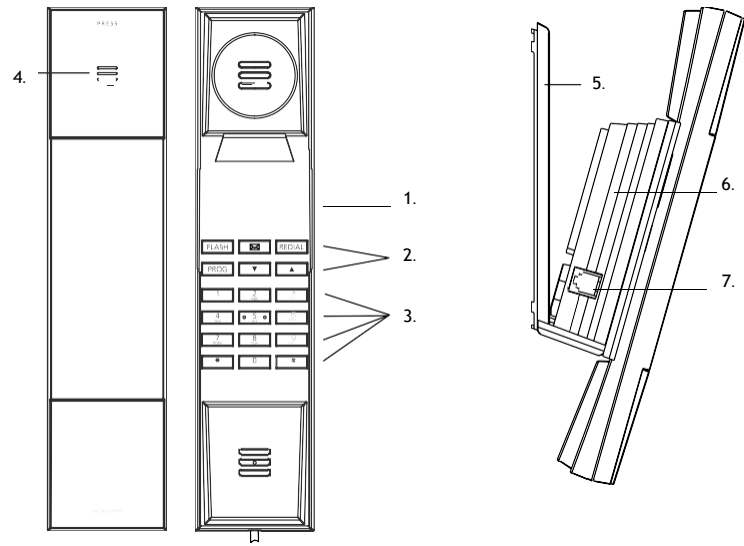

#### Handset

1. Customer logo printing area
2. 6 functional keys
3. 12 numerical keys
4. Message and ringing indicator

#### Base

5. Table stand
6. Base station
7. Handset cord jack

#### Colour scheme - front plates & keys



### Telephone HT20

#### Main Features

- Hearing aid compatible handset.
- Message button.
- Redials the last number dialed - dialed number disappears within 5 minutes.
- Default 600ms hook switch flash. Can be set from 100ms to 1000ms.
- Adjustable handset volume.
- PROG button.
- Message and Ringing Indicator.
- Desktop and wall mounting.
- Approved standards: EN 55022 and EN 55024.





## Telephone IP60D with Cordless Handset HS20D

### Main Features

- Corded Handset with Integral DECT base station VOIP, SIP compatible.
- Calls can be made and received from the base or the cordless handset. Up to 4 cordless handsets can be registered to each base.
- Supports 1.8/1.9GHz, DECT6.0, WDCT standards.
- Fast charging and low battery warning on cordless handset.
- Mute, Flash, Speaker, Hold, Redial.
- Redial deleted after ten minutes.
- Adjustable earpiece / speaker volume / ringer volume.
- Speakerphone.
- Easy web configuration.
- Desk or wall mountable.
- Supports message waiting lamp key with retrieval function.
- 8 Service buttons with icon.
- Supports obtaining IP address via DHCP/Static IP.
- Supports PCMU, G.723.1, G.729a/b, PCMA speech decoding algorithms.
- Supports RFC2833, SIP INFO, and other DTMF transmission mode.
- Supports IEEE802.1 Q standard, IEEE802.3af protocol.
- Supports SIP protocol's standards.
- Supports upgrade through HTTP/TFTP protocol.
- Adopts dynamic speech detection; Comfortable noise generation; Speech buffering technologies.
- Integrated PoE power supply function for easy installation.
- Approved standards: EN 55022 and EN 55024.




## Cordless Handset HS20D

### Main Features

- Ultra Slim Handset
- Hands free on handset
- Voice message Waiting Indicator
- 3 service keys
- Speakerphone
- Low battery indicator
- Indoor range 50 m
- Outdoor range 300 m
- Up to 4 handsets per base
- Desk or wall mountable
- Approved standards EN 55022 and EN 55024

## Telephone IP60D

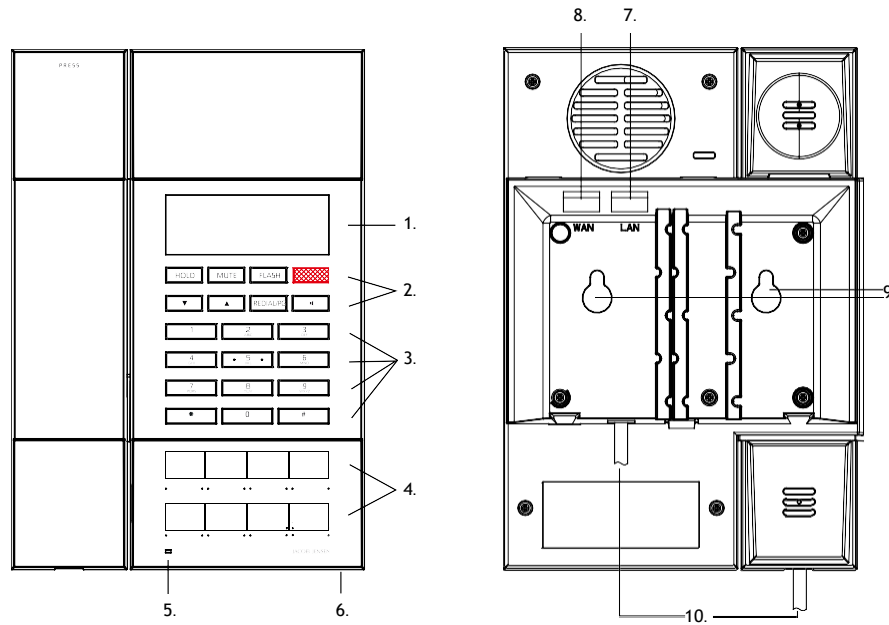

### Base unit - front

1. Customer label area
2. 8 functional keys
3. 12 numerical keys
4. Service buttons
5. Indicator (LED) - for "Mute (red)" and "Line in use (blue)"
6. Hands-free microphone


### Base unit - rear

7. LAN port
8. WAN port
9. Holes for wall mounting
10. Handset cord jack

### Colour scheme - front plates



## Cordless Handset HS20D

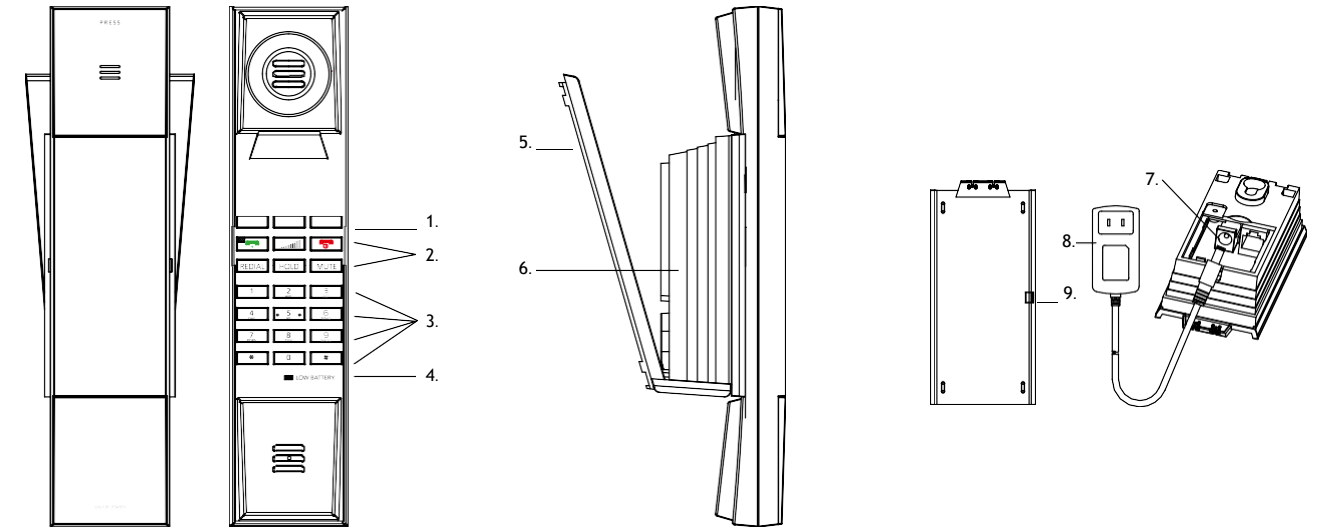

### Handset

1. Service buttons
2. 6 functional keys
3. 12 numerical keys
4. Indicator for low voltage

### Base


5. Table stand
6. Base station

### Base unit - rear

7. Power jack
8. Adapter
9. Charge indicator


### Colour scheme - front plates & keys



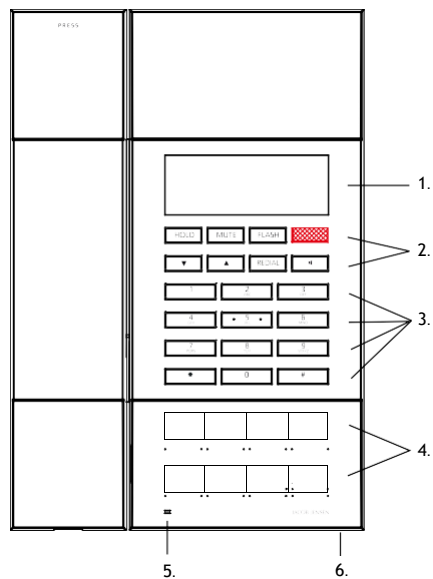

**Base unit - front**

1. Customer label area
2. 8 functional keys
3. 12 numerical keys
4. Service buttons
5. Indicator (LED) - for "Mute (red)" and "Line in use (blue)"
6. Hands-free microphone

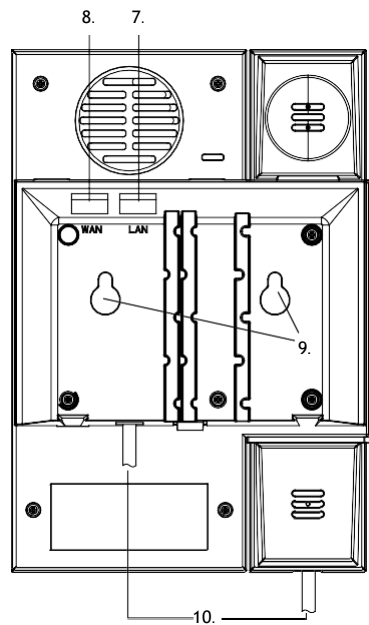

**Base unit - rear**

7. LAN port
8. WAN port
9. Holes for wall mounting
10. Handset cord jack


**Colour scheme - front plates**



**Telephone IP60**


**Main Features**

- Corded Handset VOIP and SIP compatible.
- Mute, Flash, Speaker, Hold, Redial.
- Redial deleted after ten minutes.
- Adjustable earpiece / speaker volume / ringer volume.
- Speakerphone.
- Easy web configuration.
- Desktop or wall mounting.
- Supports message waiting lamp key with retrieval function.
- 8 Service buttons with icon.
- Supports obtaining IP address via DHCP/ Static IP.
- Supports PCMU, G.723.1, G.729a/b, PCMA speech decoding algorithms.
- Supports RFC2833, SIP INFO, and other DTMF transmission mode.
- Supports IEEE802.1 Q standard, IEEE802.3af protocol.
- Supports SIP protocol's standards.
- Supports upgrade through HTTP/TFTP protocol.
- Adopts dynamic speech detection; Comfortable noise generation; Speech buffering technologies.
- Integrated PoE power supply function for easy installation.
- Approved standards: EN 55022 and EN 55024.

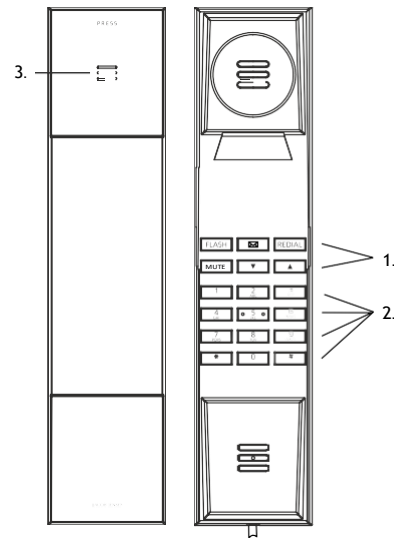


**Handset**

- 1. 6 functional keys
- 2. 12 numerical keys
- 3. Message and ringing indicator

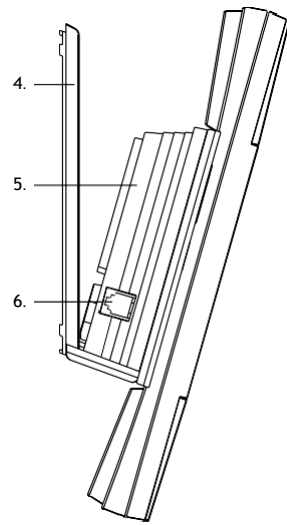

**Base**

- 4. Table stand
- 5. Base station
- 6. Handset cord jack

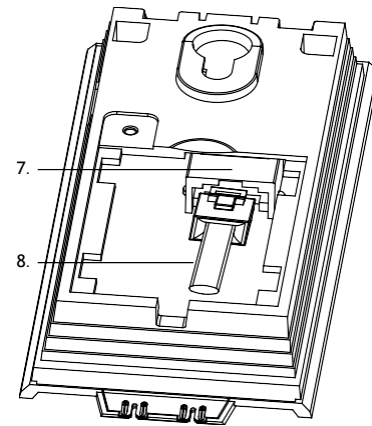

**Base - rear**

- 7. WAN Jack
- 8. Ethernet Cable

**Colour scheme - front plates & keys**



**Telephone IP20**

**Main Features**

- Mute, Flash and Redial function.
- Supports message waiting lamp key with retrieval function.
- The volume can be adjusted in 5 levels.
- Supports DHCP (dynamic host configuration protocol) and static IP address protocol for getting IP address.
- Supports PCMU, G.723.1, G.729a/b, PCMA speech decoding algorithms.
- Supports RFC2833, SIP INF, and other DTMF transmission mode.
- Supports IEEE802.1 Q standard, IEEE802.3 as standard.
- Supports SIP protocol's standards.
- Supports updating the program by HTTP.
- Dynamic voice detection; Voice polishing; Voice buffering.
- Integrated PoE power supply and easy for installation.
- Desktop and wall mounting.
- Approved standards: EN 55022 and EN 55024.







# Hospitality Partner

value added service. everyday.

